

**2026 Swisher Culvert Improvement Project
SWISHER, IOWA**

QUOTATION DATE: **MONDAY, September 14, 2026 @ 10:00 A.M.**

PLACE FOR CONTRACTORS
TO SUBMIT QUOTES: Swisher City Hall
Attn: City Clerk
66 2nd Street SW
Swisher, IA 52338
(319) 361-3025

ADDENDUM NO.2
September 10, 2026

TO ALL PLANHOLDERS:

The following changes, clarifications, additions, and/or deletions are hereby made a part of the contract documents for the above-referenced project, as fully and completely as if the same were fully set forth therein. All those submitting a Quote on the above Contract shall carefully read this Addendum and give it consideration in the preparation of their Quote.

Addendum NO. 2 consists of the following:

- Addendum NO. 2, page ADN2-1
- Plan Sheets (C.1 and M.02)
- Written Quotation

PLANS

1. **REFER TO SHEET C.1**
 - a. **REVISE** Item 3, Storm Sewer, Trenched, Plastic, 18 Inch quantity from 30 LF to 65 LF.
2. **REFER TO SHEET M.02**
 - a. **REVISE** culvert material from 18" CMP to 18" Plastic.

WRITTEN QUOTATION

1. **REFER TO SHEET 5, QUOTATION FORM**
 - a. **REVISE** Item 3, Storm Sewer, Trenched, Plastic, 18 Inch quantity from 30 LF to 65 LF.


The receipt and acceptance of Addendum NO. 2 shall be acknowledged by signing in the space provided on the Quote Form. Quotes submitted without Addendum NO. 2 being acknowledged will be considered non-responsive.

MELISSA CLOW, PE
HR GREEN, INC.
150 1st AVE NE, SUITE 300
CEDAR RAPIDS, IOWA 52401
PHONE: (319) 841-4000

END OF ADDENDUM NO.2

ESTIMATED PROJECT QUANTITIES				
Item No.	Item Code	Item	Unit	Total Qty.
1.APPLY THE 2025 IOWA SUDAS SPECIFICATIONS FOR PRODUCT SPECIFICATION AND EXECUTION METHODOLOGY.				
2.SUPPLEMENTAL SPECIFICATIONS: CITY OF SWISHER, SUPPLEMENTAL SPECIFICATIONS TO IOWA STATEWIDE URBAN				
STANDARD SPECIFICATIONS (SUDAS) FOR PUBLIC IMPROVEMENTS, DATED APRIL 2023				
1	2010-D	TOPSOIL, OFF-SITE, 8 INCH	CY	82
2	2010-E	CLASS 10 EXCAVATION	CY	200
3	4020-A-1	STORM SEWER, TRENCHED, CMP, 12 INCH	LF	6
4	4020-A-1	STORM SEWER, TRENCHED, PLASTIC, 18 INCH	LF	65
5	4020-D	REMOVAL OF STORM SEWER, RCP, 12 INCH	LF	34
6	4030-B	PIPE APRON, CMP, 12 INCH	EA	2
7	4030-B	PIPE APRON, CMP, 18 INCH WITH GUARD	EA	1
8	6010-B	INTAKE, SW-512, 24 INCH	EA	1
9	7030-H-3	DRIVEWAY, GRANULAR, 6 INCHES	SY	83
10	7040-A	FULL DEPTH PATCHES, HMA	SY	20
11	7060-A	BITUMINOUS SEAL COAT, 3/8 INCH DOUBLE SEAL COAT	SY	331
12	8030-A	TEMPORARY TRAFFIC CONTROL	LS	1
13	8040-I	REMOVE AND REINSTALL TRAFFIC SIGNS	EA	1
14	9010-A	CONVENTIONAL SEEDING, SEEDING, FERTILIZING, AND MULCHING, TYPE 1	AC	0.08
15	9040-J	RIP RAP, EROSION STONE	TON	7.9
16	11010-A	CONSTRUCTION SURVEY	LS	1
17	11020-A	MOBILIZATION	LS	1

2

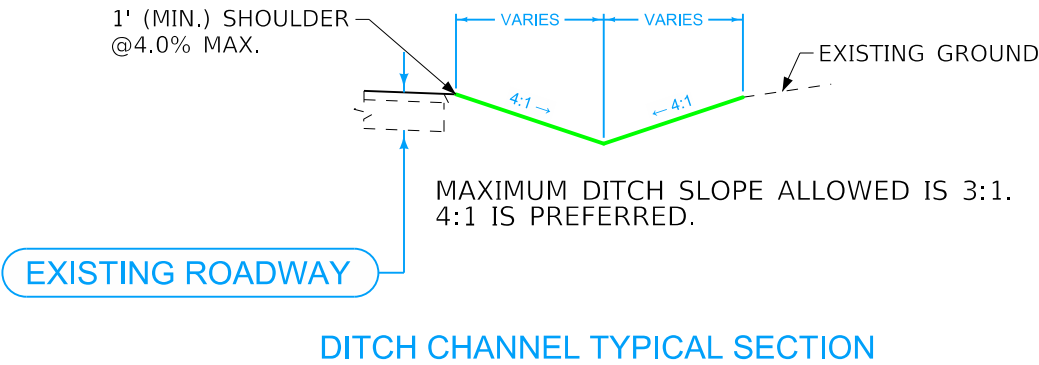

ESTIMATE REFERENCE INFORMATION		
Item No.	Item Code	Description
1	2010-D	TOPSOIL, OFF-SITE, 8 INCH
2	2010-E	CLASS 10 EXCAVATION
3	4020-A-1	STORM SEWER, TRENCHED, CMP, 12 INCH
4	4020-A-1	STORM SEWER, TRENCHED, PLASTIC, 18 INCH
		A. REFER TO M SHEET FOR LOCATIONS.
		B. BID ITEM INCLUDES ALL EXCAVATION, BACKFILL, HAULING, MATERIALS, COMPACTION TESTING, AND LABOR.
5	4020-D	REMOVAL OF STORM SEWER, RCP, 12 INCH
		A. REFER TO M SHEETS FOR LOCATIONS.
		B. BID ITEM INCLUDES REMOVAL OF EXISTING PIPE APRONS AND SHALL BE CONSIDERED INCIDENTAL.
		C. BID ITEM INCLUDES ALL EXCAVATION, HAULING, FURNISHING, PLACEMENT, AND COMPACTION OF SUBGRADE
		AND SUBBASE MATERIALS, COMPACTION TESTING, AND LABOR.
6	4030-B	PIPE APRON, CMP, 12 INCH
7	4030-B	PIPE APRON, CMP, 18 INCH WITH GUARD
		A. REFER TO M SHEET FOR LOCATIONS.
		B. SUPPLY CMP PIPE APRONS ACCORODING TO SUDAS FIGURE 4030.225.
		C. PROVIDE METAL APRON GUARD ON 18" PIPE APRON AND LARGER.
		D. FOOTINGS AND APRON GUARDS ARE CONSIDERED INCIDENTAL.
8	6010-B	INTAKE, SW-512, 24 INCH
		A. REFER TO M SHEET FOR LOCATIONS.
9	7030-H-3	DRIVEWAY, GRANULAR, 6 INCHES
		A. REFER TO M SHEET FOR LOCATIONS.
10	7040-A	FULL DEPTH PATCHES, HMA
		A. REFER TO M SHEET FOR LOCATIONS.
		B. CONTRACTOR SHALL REPLACE HMA PAVEMENT IN AREAS FOR FULL DEPTH PATCHING AND SHALL MATCH
		EXISTING PAVEMENT DEPTH, ENSURING FINAL GADE IS FLUSH TO ADJACENT PAVEMENT.
		C. ITEM WILL BE MEASURED AND PAID PER SQUARE YARD AND SHALL BE CONSIDERED FULL COMPENSATION FOR
		FURNISHING ALL TOOLS, EQUIPMENT, LABOR, AND MATERIALS NECESSARY.
		D. HMA MIX USED FOR ASPHALT PATCHING, REMOVAL OF PAVEMENT FOR PATHCING CONSIDERED INCIDENTAL.
11	7060-A	BITUMINOUS SEAL COAT, 3/8 INCH DOUBLE SEAL COAT
		A. REFER TO M SHEET FOR LOCATIONS.
		B. CONTRACTOR MAY USE CHIPS OR PEA GRAVEL ON THE FIRST SEAL COAT AS COVER AGGREGATE.
		C. CONTRACTOR TO USE PEA GRAVEL ONLY AS THE SECOND SEAL COAT COVER AGGREGATE.
		D. ITEM WILL BE MEASURED AND PAID PER SQUARE YARD AND SHALL BE CONSIDERED FULL COMPENSATION FOR
		FURNISHING ALL TOOLS, EQUIPMENT, LABOR, AND MATERIALS NECESSARY.
12	8030-A	TEMPORARY TRAFFIC CONTROL
		A. TRAFFIC CONTROL FOR CONSTRUCTION OUTSIDE THE ROADWAY SHALL FOLLOW SUDAS 8030.102.
		B. SUDAS 8030.116 SHALL BE FOLLOWED IF A ROAD CLOSURE IS REQUIRED.
		C. ALL TRAFFIC CONTROL USED ON THIS PROJECT TO BE SUFFICIENTLY WEIGHTED TO PREVENT MOVEMENT BY
		NATURAL FORCES.
		D. CONTRACTOR TO GIVE ADJACENT PROPERTY OWNERS AT LEAST 7 DAYS NOTICE BEFORE CONSTRUCTION BEGINS.
		E. ACCESS TO ADJACENT PROPERTIES SHALL BE MAINTAINED AT ALL TIMES.
13	8040-I	REMOVE AND REINSTALL TRAFFIC SIGNS
		A. REFER TO M SHEET FOR LOCATIONS.
14	9010-A	CONVENTIONAL SEEDING, SEEDING, FERTILIZING, AND MULCHING, TYPE 1
15	9040-J	RIP RAP, EROSION STONE
		A. REFER TO M SHEET FOR LOCATIONS.
		B. INSTALL PER FIGURE 9040.111
16	11010-A	CONSTRUCTION SURVEY
17	11020-A	MOBILIZATION

QUOTATION FORM

2026 Swisher Culvert Improvement Project SWISHER, IOWA

PROPOSAL ATTACHMENT: PART C – BID ITEMS, QUANTITIES AND PRICES

This is a UNIT BID PRICE CONTRACT. The contractor must provide the Unit Bid Price, the Total Bid Price, and the Total Construction Cost; in case of discrepancy, the Unit Bid Price governs. The quantities shown on the Proposal Attachment: Part C – Bid Items, Quantities and Prices are approximately only, but are considered sufficiently adequate for the purpose of comparing quotes. The Jurisdiction shall only use the Total Construction Cost for comparison of quotes.

ITEM NO.	ITEM CODE	DESCRIPTION	UNIT	QUANTITY	UNIT PRICE	TOTAL PRICE
BASE BID						
DIVISION 2 – EARTHWORK						
1	2010-D-3	TOPSOIL, OFF-SITE, 6 INCH	LF	68		\$ -
DIVISION 4 – SEWERS AND DRAINS						
2	4020-A-1	STORM SEWER, TRENCHED, CMP, 12 INCH	LF	6		\$ -
3	4020-A-1	STORM SEWER, TRENCHED, PLASTIC, 18 INCH	LF	65		\$ -
4	4020-D	REMOVAL OF STORM SEWER, RCP, 12 INCH	LF	34		\$ -
5	4030-B	PIPE APRON, CMP, 12 INCH	EA	2		\$ -
6	4030-B	PIPE APRON, CMP, 18 INCH WITH GUARD	EA	1		\$ -
DIVISION 6 – STRUCTURES FOR SANITARY AND STORM SEWERS						
7	6010-B	INTAKE, SW-512, 24 INCH	EA	1		\$ -
DIVISION 7 – STREETS AND RELATED WORK						
8	7030-H-3	DRIVEWAY, GRANULAR, 6 INCHES	SY	83		\$ -
9	7040-A	FULL-DEPTH PATCHES, HMA	SY	20		\$ -
10	7060-A	BITUMINOUS SEAL COAT, 3/8 INCH DOUBLE SEAL COAT	SY	331		\$ -
DIVISION 8 - TRAFFIC CONTROL						
11	8030-A	TEMPORARY TRAFFIC CONTROL	LS	1		\$ -
12	8040-I	REMOVE AND REINSTALL TRAFFIC SIGNS	EA	1		\$ -
DIVISION 9 – SITE WORK AND LANDSCAPING						
13	9010-A	CONVENTIONAL SEEDING, SEEDING, FERTILIZING, AND MULCHING, TYPE 1	AC	0.08		\$ -
14	9040-J	RIP-RAP, EROSION STONE	TON	7.9		\$ -
DIVISION 11 - MISCELLANEOUS						
15	11,020-A	MOBILIZATION	LS	1		\$ -
TOTAL BASE BID ITEMS (1-15)						\$ -

NOTE: It is understood that the above quantities are estimated for the purpose of this quote. All quantities are subject to revision by the city. Quantity changes which amount to twenty (20) percent or less of the total quote shall not affect the unit price bid.

Contractor